


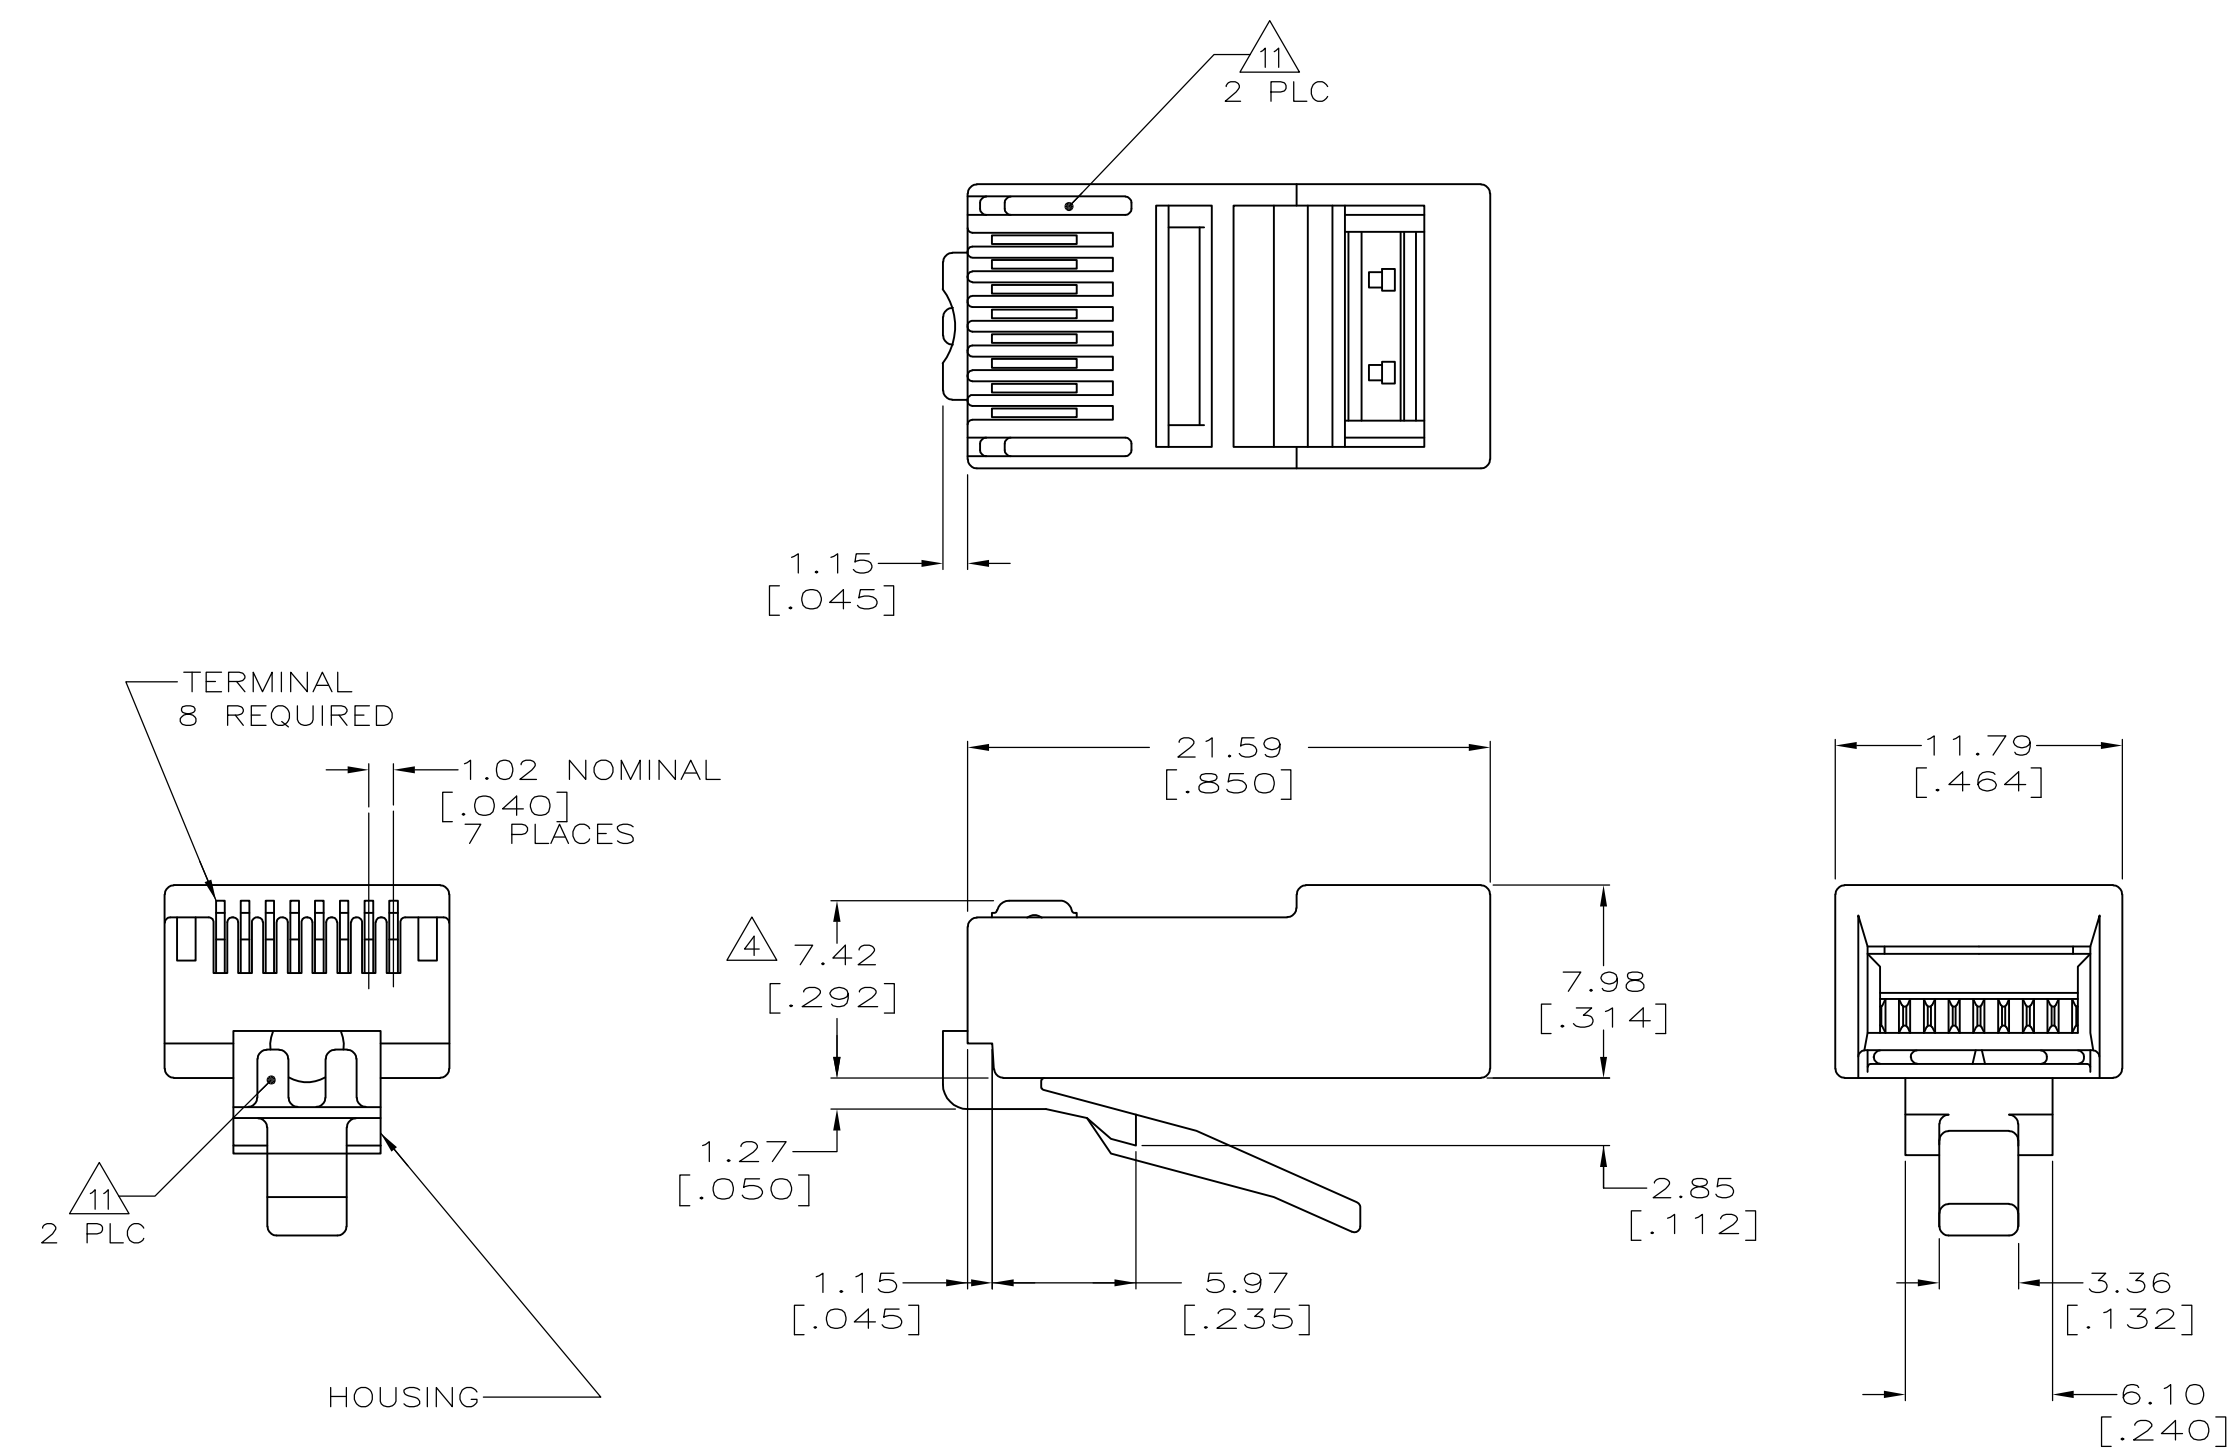

- 1

DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2

MATERIAL: HOUSING-POLYCARBONATE,CLEAR.
TERMINAL-0.36[.014] THICK PHOSPHOR
BRONZE PLATED WITH 1.27μm[.000050]
THICK GOLD IN LOCALIZED GOLD PLATE
AREA,OVER 2.54μm[.000100] THICK NICKEL
UNDERPLATE.
- 3

PLUG WILL ACCEPT 26 OR 28 AWG STRANDED
WIRE HAVING A MAXIMUM INSULATION
DIAMETER OF 0.89-0.99[.035-.039]
AND A MAXIMUM OVAL CABLE JACKET OF
2.54 X 8.89[.100 X .350].
- 4

TERMINATED DIMENSION 6.15[.242]
MAXIMUM.
- 6


10,000 ASSEMBLIES PER PACKAGE.
- 7

500 ASSEMBLIES PER PACKAGE.
- 8

100 ASSEMBLIES PER PACKAGE.

8	5-554739-3
7	5-554739-2
6 11	5-554739-1
REELED	554739-1
PACKAGED	PART NUMBER

SUPSD BY 5-554739-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YTP/UTA 8-27-93	TE TE Connectivity			
DIMENSIONS: mm[INCHES]		CHK C.WHITT 9-15-93				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD TONEY/MCGRATH 9-20-93	NAME			
		PRODUCT SPEC 108-1163	MODULAR PLUG ASSEMBLY, 8 POSITION, FLAT OVAL CABLE			
		APPLICATION SPEC 114-6016				
		WEIGHT —				
		SIZE CAGE CODE DRAWING NO RESTRICTED TO				
MATERIAL —	FINISH —	CUSTOMER DRAWING	A2	00779	C-554739	—
			SCALE		SHEET	REV
			4:1		1 of 1	S